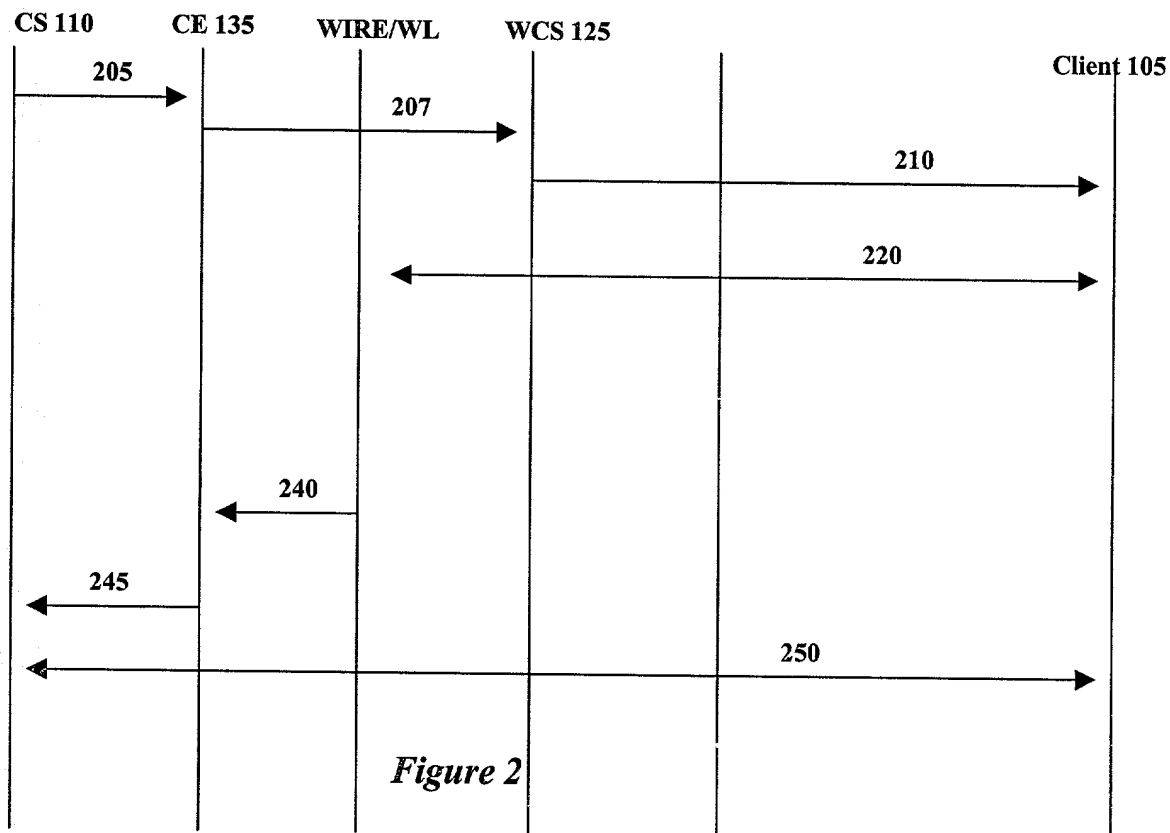


Figure 1



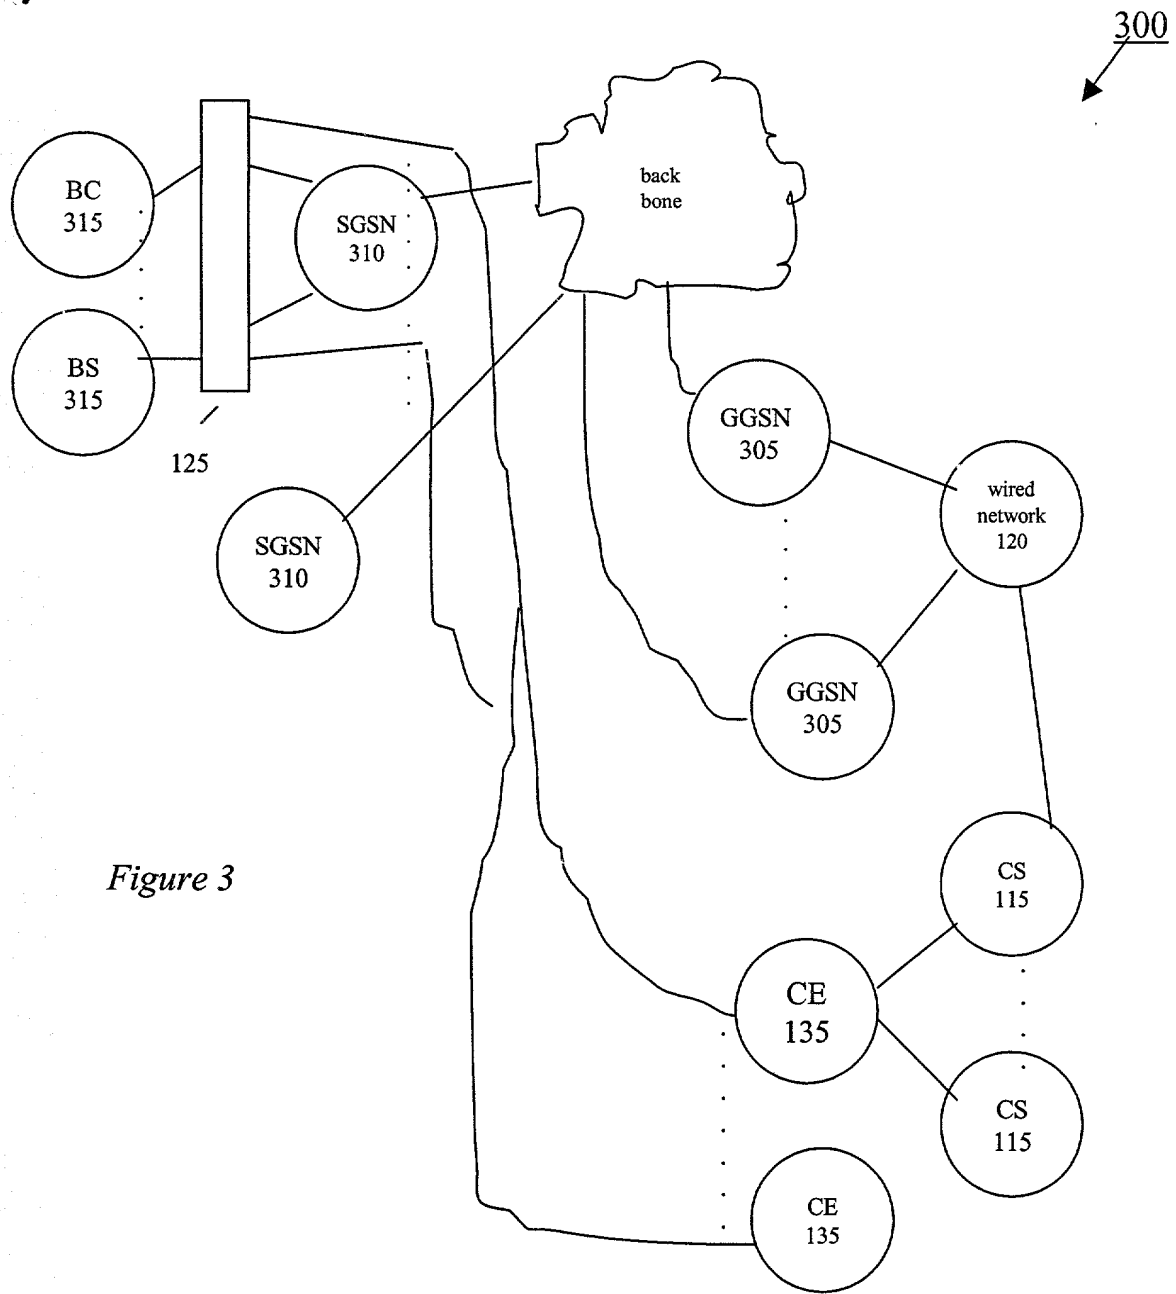


Figure 3


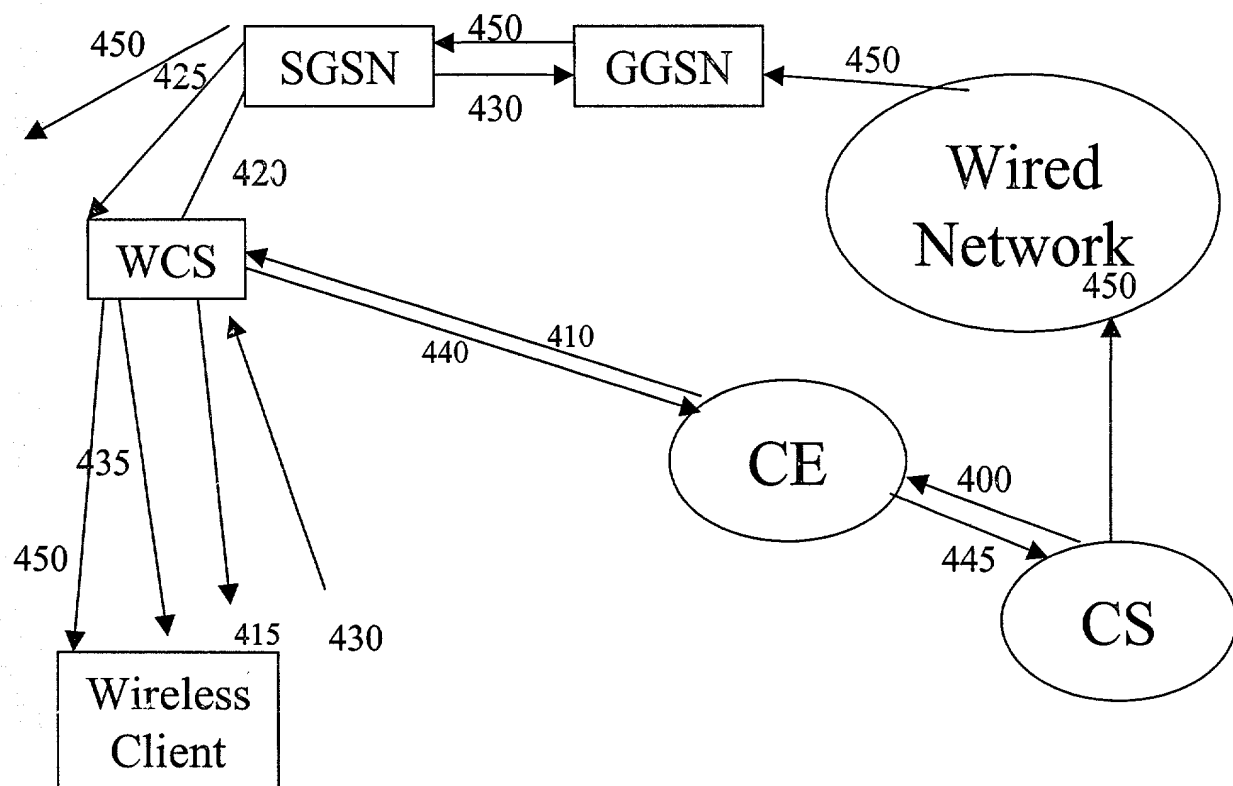


FIGURE 4

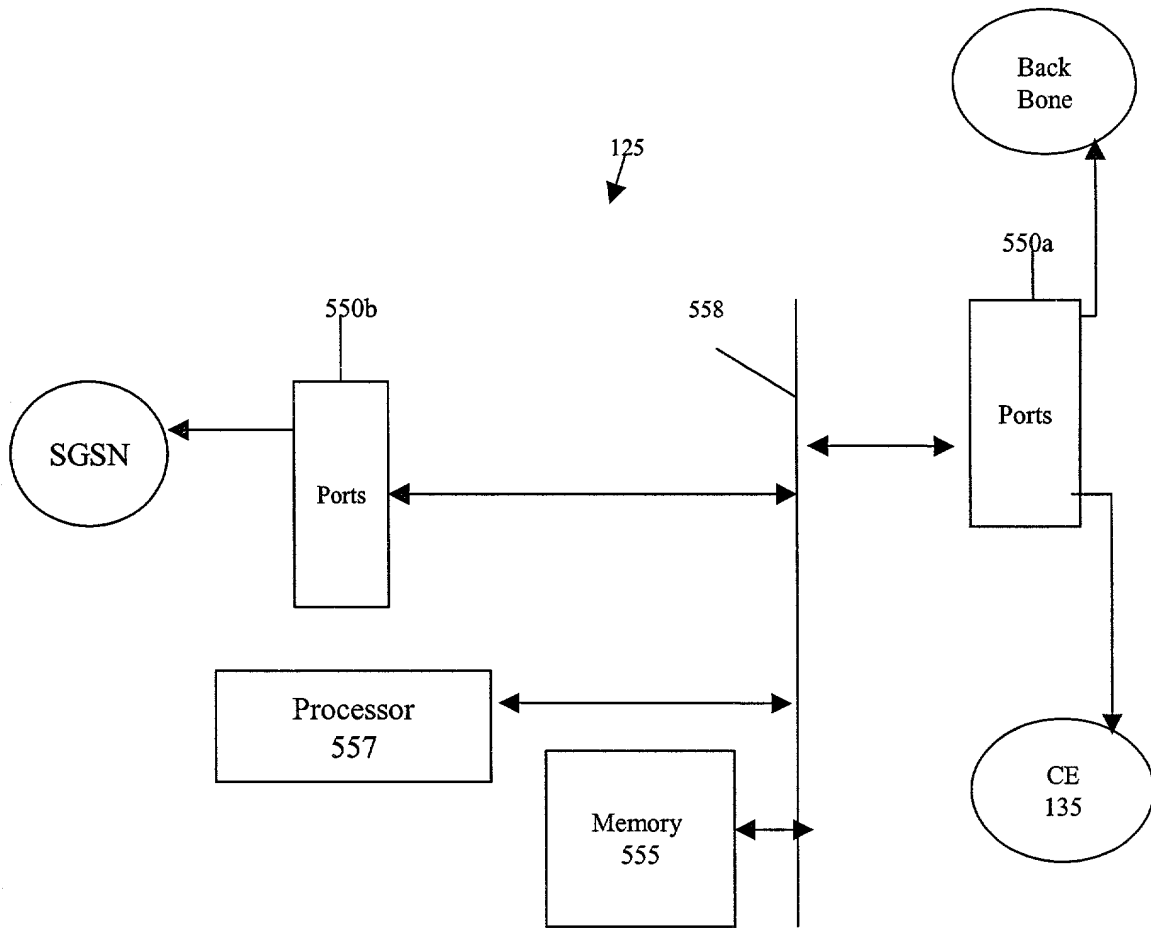

560

565a 565b 565c

565

WL Client Ind	CE Indicator	BSS Ind.
.	.	.
.	.	.
.	.	.
.	.	.
.	.	.
.	.	.
.	.	.
.	.	.
.	.	.
.	.	.

Figure 5

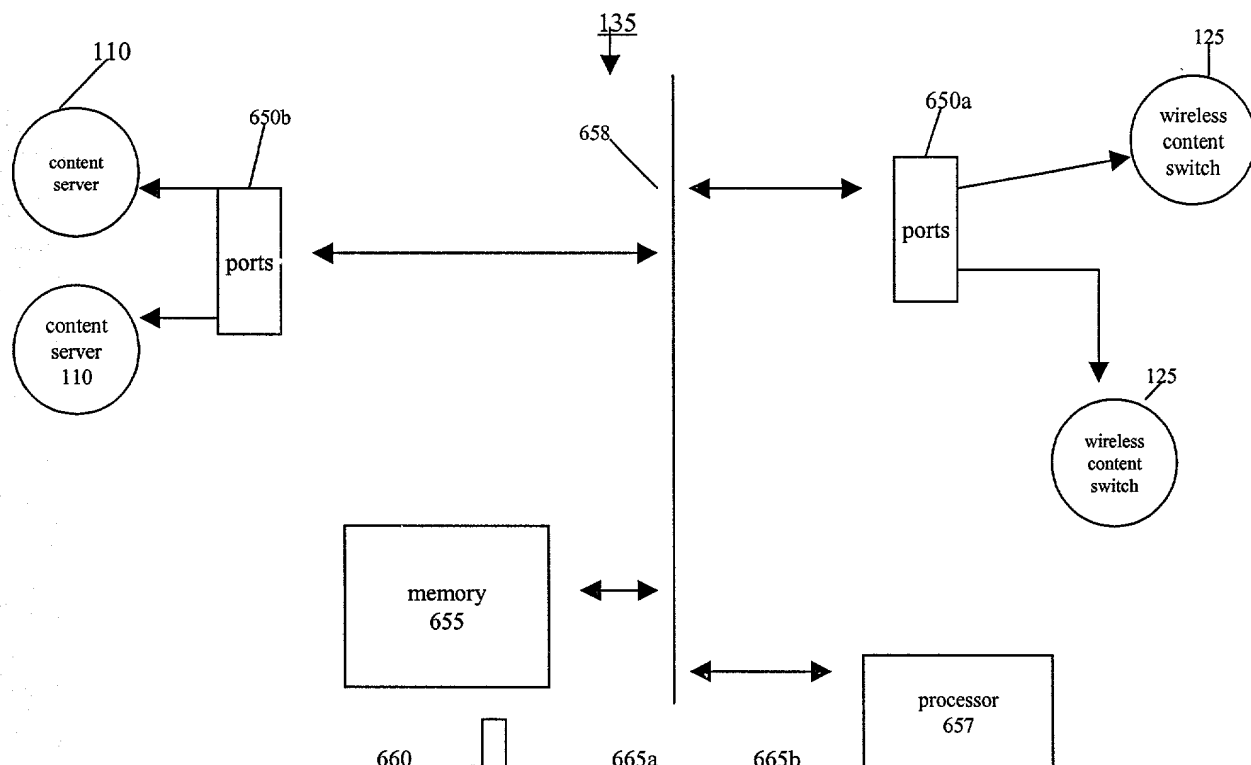


Figure 6

Diagram illustrating a table structure (660) with two columns: "wl client ind" and "cs indicator". The table contains multiple rows, with the first row highlighted. A bracket (665) indicates the data rows. Labels 665a and 665b point to the first data row.

660	665a	665b
	wl client ind	cs indicator
665		
	.	.
	.	.
	.	.
	.	.
	.	.

	670	675a	675b
	wireless client id		wireless content switch
675	.		.
	.		.
	.		.
	.		.
	.		.